
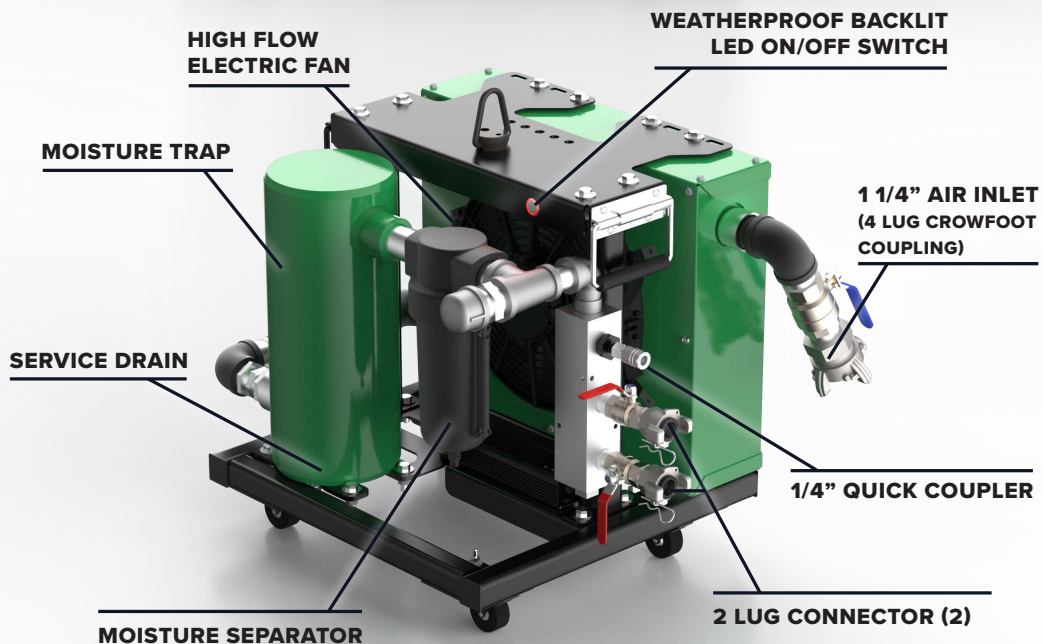


PORTABLE ADCS SPECIFICATIONS

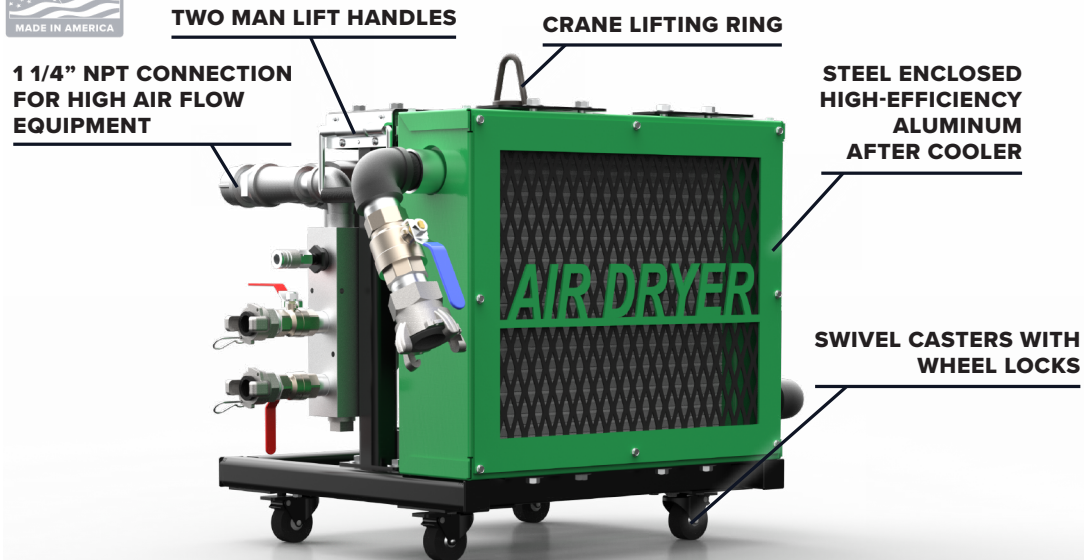

Specifications

- 31" L x 22" W x 21" H
- Weight: 116 lb
- Max Pressure: 150 PSI
- Max Flow: 425 SCFM
- Air Output:
 - 1 x 1 1/4" NPT Connector
 - 1 x 1/4" Quick Connector
 - 2 Lug Connector (2)

Features

- Cooling of source air within 15% ambient
- General purpose filter, air quality: within ISO 8573-1, Class 6 and Class 7 (particulates)
- 416 cubic inch moisture trap with service drain
- 1 1/4" NPT connection for high air flow equipment
- 1/4" quick coupler for hand tools
- 2 lug connector for intermediate sized tools and equipment (2)
- Powered by an AC to DC power supply provided or included 12 volt battery clamp

Includes

- 1 1/4" ball valve
- 1 1/4" pipping with 4 lug input connection
- 1 1/4" high flow NPT connector
- 1/4" air chuck quick connector
- 2 lug air connector with ball valve (2)
- 10" radiator cooling fan with 30 amp fuse
- High flow aluminum radiator
- 300 watts waterproof IP67 power supply 90-130V AC to 12V DC 25A
- 12 volt battery clamp and harness (12 foot)
- Spring return two man lift handles
- Crane lifting ring
- Swivel casters with wheel locks (4)
- Waterproof backlit LED on/off switch