

ADCS-2500 SPECIFICATIONS



1 1/4" AIR INLET
(4 LUG CROWFOOT COUPLING)

PRESSURE GAUGE
(0-300 PSI)

1 1/4" AIR OUTLET
(4 LUG CROWFOOT COUPLING)

**ALUMINUM AFTER
COOLERS (2)**


**HIGH FLOW
ELECTRIC FANS (2)**

MOISTURE SEPARATOR

WATER TRAP

**1/4" MOISTURE
DRAIN**

10' BATTERY CABLES

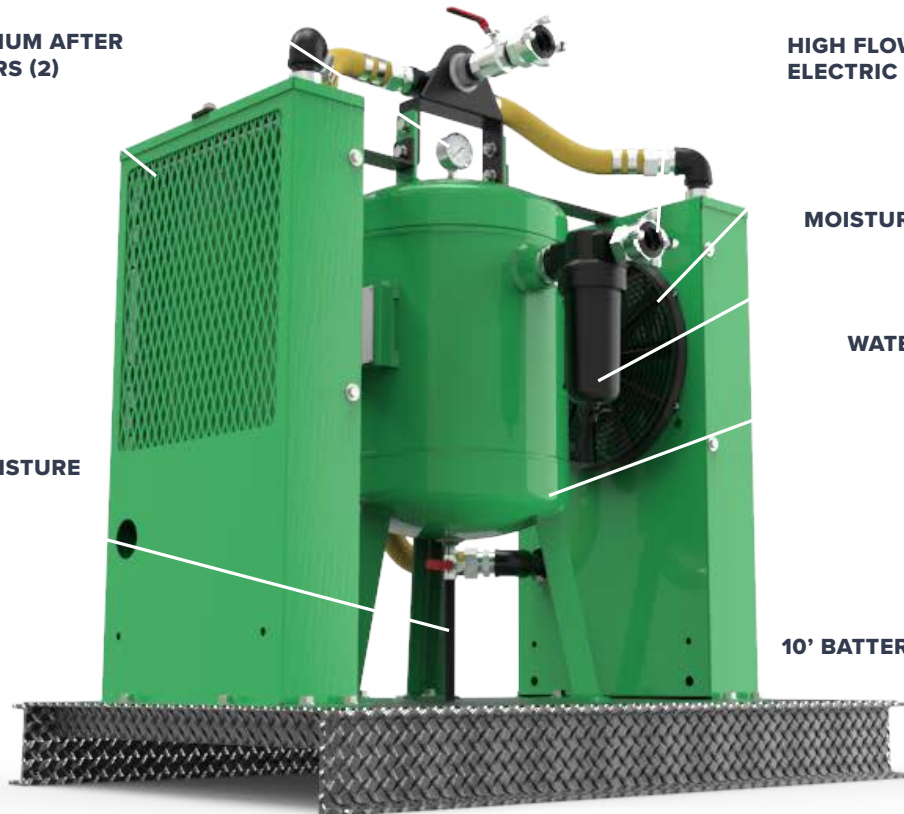

Features

- Cools, cleans, and dries air up to 2500 SCFM at 150 PSI
- Air is oil and moisture free, and cooled within 4° of ambient temp
- Skid mounted for easy transportation
- Can be powered by any 12V, minimum 6 amp power source

Specifications

- 48" L x 34" W x 51" H
- Weight: 446 lbs
- Fan Power Consumption:
12V and 6 amps/hour
- 2500 SCFM Capable Water Trap

Moisture in compressed air can clog blast pots, and decreases the quality of the blasted substrate by putting moisture back on the surface.

This heavy duty moisture and oil separator cools, cleans, and dries the discharged air.

With two stage filtration, cyclone separation, and residual filtration, the moisture trap is exceptionally efficient while assuring minimal pressure drop.